


Note:

Top covers shown below to be installed on top layer of AQUALITY Modules only

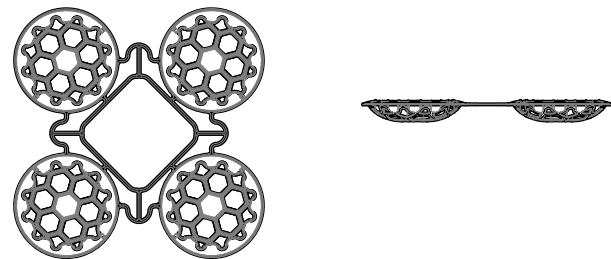

| Minimum cover depths (1) over the top of AQUALITY Geocellular | |
|--|------------------------------|
| Location | Minimum cover depth (m) (4) |
| Non-Trafficked areas i.e. Landscaping | 0.5 |
| Car parks, vehicle up to 2500kg gross mass | 0.6 |
| Car parks, occasional vehicle greater than 2500kg (3) gross mass | 0.75 |
| Occasional HGV traffic up to 44000kg GVW (HA loading) | Please consult with AQUALITY |

- (1) Assumes 27 degree load distribution through fill material and overlaying surface asphalt or block paving
- (2) Minimum cover depth to avoid accidental damage from gardening/landscaping work
- (3) Occasional Trafficking by refuse collection or similar vehicles (typically one per week)
- (4) Please check minimum frost cover depths for geographical location

| | |
|--|-----------------------|
| Project: _____ | |
| Title: _____ | |
| System: AQUALITY Storage Block HD attenuation (on-line) | |
| Project-No: 0000-00 | Drawing-No: 0000-0 |
| Project state: Design | Date: 2018-04-15 |
| Scale: 1:30@A3 | Revision: 0 |
| Drawn by: AT | Checked by: NRW |



AQUALITY Trading & Consulting Ltd
6 Wadsworth Road
London UB6 7JJ
www.aqua-lity.co.uk
Tel.: +44 (0)20 8991 3725